



## Aura S

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
*Park&Garden&Street Lighting | Decorative Series*

---



## Aura S




Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
Park&Garden&Street Lighting | Decorative Series





# Aura S

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
Park&Garden&Street Lighting | Decorative Series

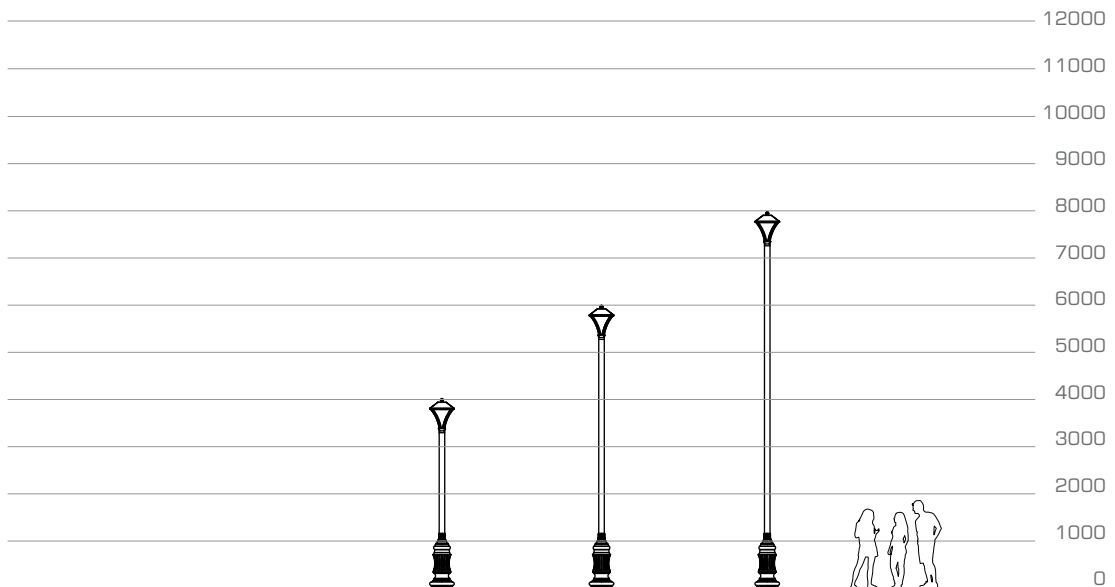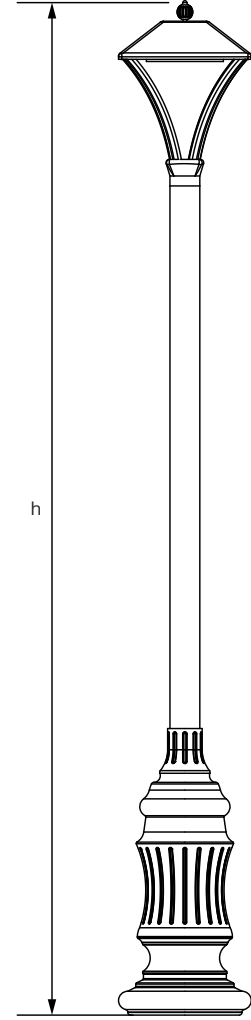

# Aura S

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
Park&Garden&Street Lighting | Decorative Series



## Teknik Veriler | Technical Data

| Model<br>Model | Güç<br>Power | Işık Akısı<br>Lumen Flux | Uzunluk (h)<br>Length |
|----------------|--------------|--------------------------|-----------------------|
| Aura S         | 40W          | 4200lm                   | 4m                    |
| Aura S         | 75W          | 9000lm                   | 6m                    |
| Aura S         | 105W         | 12600lm                  | 8m                    |


## Mekanik özellikler

- Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
- Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
- Isıya ve darbeye dayanıklı IP Lens grubu
- Paslanmaz vidalar
- Alüminyum döküm kaide
- Silikon conta
- Isı geçirgenliği yüksek elektrostatik polyester toz boya
- EN-60598 Avrupa Standartlarına uygundur
- Mekanik dayanım direnci IK08
- Neme ve toza karşı koruma sınıfı IP66
- Elektriksel koruma sınıfı Class I

## Mechanical properties

- Corrosion resistant die-cast aluminium extrusion body or stainless steel body
- Excellent heat dissipation for cooling electronic components
- Impact and heat resistant IP lens group
- Stainless steel screws
- Aluminum casting base
- Waterproof and durable silicone gaskets
- Electrostatic polyester powder coating with high thermal conductivity
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK08
- Protection level IP66
- Electrical protection Class I

## Ürün detayları | Product details

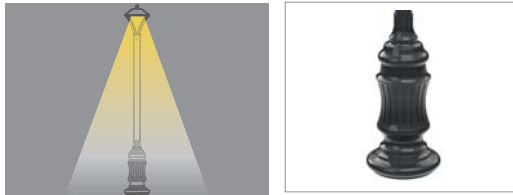

## Aksesuarlar | Accessories



Sigorta  
Fuse

Parafudr  
Surge protection device

|                   |    |     |      |     |        |          |                |                      |                 |       |        |   |
|-------------------|----|-----|------|-----|--------|----------|----------------|----------------------|-----------------|-------|--------|---|
| GUARANTY<br>3 yrs | CE | TSE | RoHS | ERC | DRIVER | IP<br>66 | IK 08<br>IK 10 | 220V-240V<br>50/60Hz | Ta -40°<br>+50° | Ra>70 | Pf>0,9 | ⊕ |
|-------------------|----|-----|------|-----|--------|----------|----------------|----------------------|-----------------|-------|--------|---|