



Candle

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series



Candle



Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series





Candle

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series

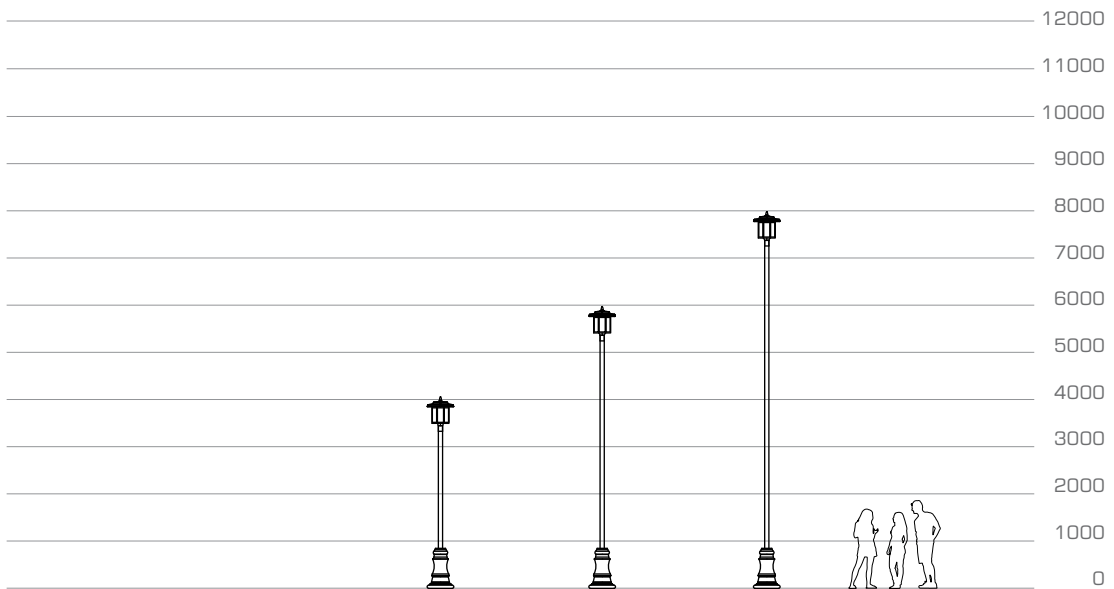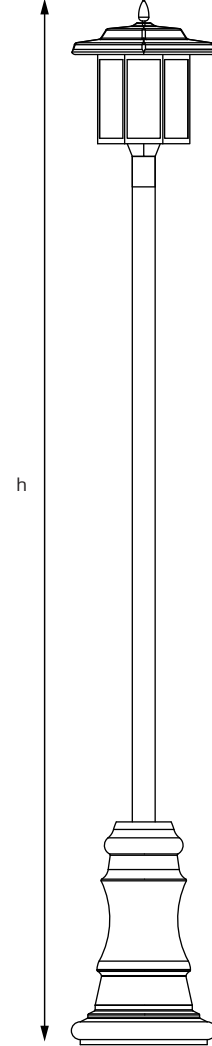

Candle

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series



Teknik Veriler | Technical Data

| Model Model | Güç Power | Işık Akısı Lumen Flux | Uzunluk (h) Length |
|----------------|--------------|--------------------------|-----------------------|
| Candle | 40W | 3400lm | 4m |
| Candle | 75W | 6375lm | 6m |
| Candle | 75W | 6375lm | 8m |


Mekanik özellikler

- Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
- Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
- Isıya ve darbeye dayanıklı IP Lens grubu
- Paslanmaz vidalar
- Alüminyum döküm kaide
- Silikon conta
- Isı geçirgenliği yüksek elektrostatik polyester toz boya
- EN-60598 Avrupa Standartlarına uygundur
- Mekanik dayanım direnci IK08
- Neme ve toza karşı koruma sınıfı IP66
- Elektriksel koruma sınıfı Class I

Mechanical properties

- Corrosion resistant die-cast aluminium extrusion body or stainless steel body
- Excellent heat dissipation for cooling electronic components
- Impact and heat resistant IP lens group
- Stainless steel screws
- Aluminum casting base
- Waterproof and durable silicone gaskets
- Electrostatic polyester powder coating with high thermal conductivity
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK08
- Protection level IP66
- Electrical protection Class I

Ürün detayları | Product details



Aksesuarlar | Accessories



Sigorta
Fuse



Parafudr
Surge protection device

| | | | | | | | | | | | | |
|-------------------|----|-----|------|-----|--------|----------|----------------|----------------------|-----------------|-------|--------|---|
| GUARANTY 3 yrs | CE | TSE | RoHS | ERC | DRIVER | IP 66 | IK 08 IK 10 | 220V-240V 50/60Hz | Ta -40° +50° | Ra>70 | Pf>0,9 | ⊕ |
|-------------------|----|-----|------|-----|--------|----------|----------------|----------------------|-----------------|-------|--------|---|