



Hera

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series



Hera


Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series





Hera

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series

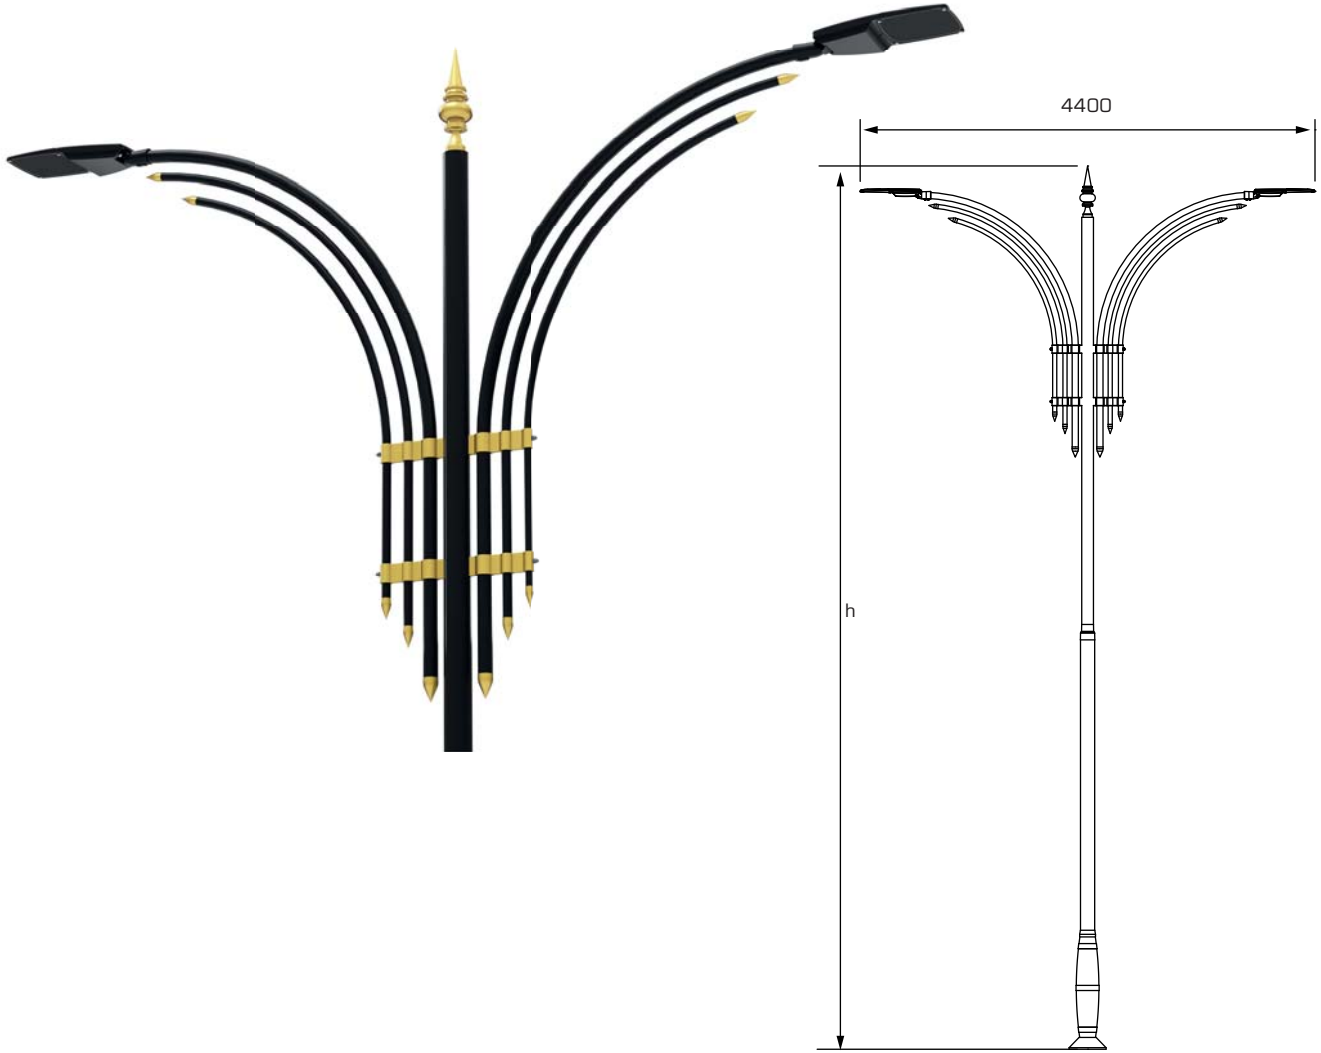

Hera

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series



Teknik Veriler | Technical Data

Model Model	Güç Power	Işık Akısı Lumen Flux	Uzunluk (h) Length
Hera	70Wx2	16800lm	6m
Hera	70Wx2	16800lm	8m
Hera	105Wx2	25200lm	10m
Hera	140Wx2	33600lm	12m


Mekanik özellikler

- Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
- Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
- Isıya ve darbeye dayanıklı IP Lens grubu
- Paslanmaz vidalar
- Alüminyum döküm kaide
- Silikon conta
- Isı geçirgenliği yüksek elektrostatik polyester toz boya
- EN-60598 Avrupa Standartlarına uygundur
- Mekanik dayanım direnci IK08
- Neme ve toza karşı koruma sınıfı IP66
- Elektriksel koruma sınıfı Class I

Mechanical properties

- Corrosion resistant die-cast aluminium extrusion body or stainless steel body
- Excellent heat dissipation for cooling electronic components
- Impact and heat resistant IP lens group
- Stainless steel screws
- Aluminum casting base
- Waterproof and durable silicone gaskets
- Electrostatic polyester powder coating with high thermal conductivity
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK08
- Protection level IP66
- Electrical protection Class I

Ürün detayları | Product details

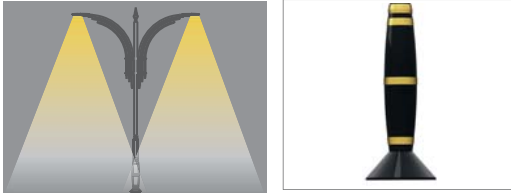

Aksesuarlar | Accessories



Sigorta
Fuse

Parafudr
Surge protection device

GUARANTY 3 yrs	CE	TSE	RoHS	ERC	DRIVER	IP 66	IK 08 IK 10	220V-240V 50/60Hz	Ta -40° +50°	Ra>70	Pf>0,9	⊕
-------------------	----	-----	------	-----	--------	----------	----------------	----------------------	-----------------	-------	--------	---