

- 316 L chrome body and chrome spot frame
- Polycarbonate luminaire glass
- Plastic injection mounting box
- Underwater connector
- H07RNF rubber cable

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC500N	WW-NW-CW	12-24V DC	2	150	0,25
AC500N	WW-NW-CW	12-24V DC	3	310	0,25
AC500N	RGB	7,5V DC	8	-	0,25

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color.

## C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

## S System Options


- 01 Standart (ON/OFF)
- 02 PWM-DIM

## O Lens Options



XN: Extra Narrow Angle    N: Narrow Angle    W: Wide Angle

## M Mounting Options

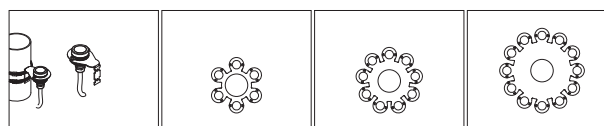

16: 1 pole connection    17: 6 pole connection    18: 9 pole connection    19: 12 pole connection




Order Code

P . W . C . S . O . M



## Product Diagrams

Polar Diagram

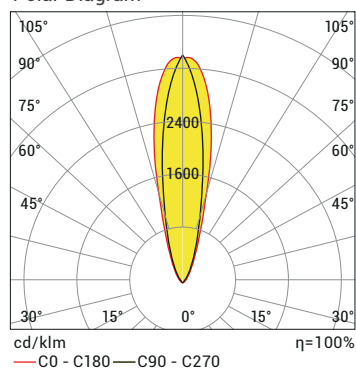

Conical Diagram

H (mt)	$\varnothing$ (m)	E <sub>max</sub> (lx)
3.0	1,08	116
2.5	0,90	167
2.0	0,72	262
1.5	0,54	465
1.0	0,36	1047
0.5	0,18	4186

AC500N CW 25D 3W 12-24V DC IP68

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC500N	5	PWM	2x	-	-
	7,5	PWM	-	4x	-
	12-24	ON/OFF	2x	-	-