

- 3mm 316 L chrome spot frame
- 316 L Press forming chrome body
- 12 mm tempered glass
- 316 L Stainless connectors
- Plastic injection mounting box
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC5F18	WW-NW-CW	12-24V DC	21	2.100	2,5
AC5F18	WW-NW-CW	12-24V DC	32	3.200	2,5
AC5F18	WW-NW-CW	12-24V DC	46	4.800	2,5
AC5F18 *	RGB	24V DC	36	-	2,5
AC5F18 *	RGB	24V DC	26	-	2,5

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color. *RGB products can be produced in 12-24 V DC and product values may vary


C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM
- 03 Invert PWM-DIM

O Lens Options

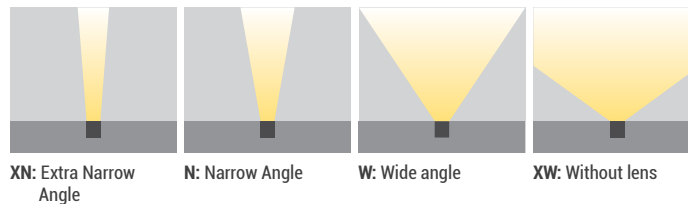


Order Code

P . W . C . S . O



Product Diagrams

Polar Diagram

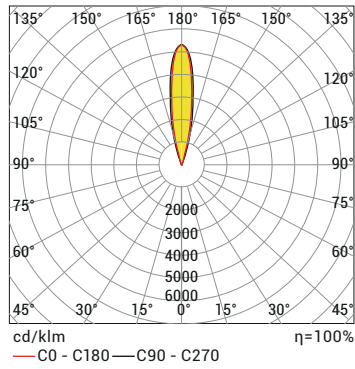

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
3.0	1,05	1244
2.5	0,87	1792
2.0	0,70	2799
1.5	0,52	4977
1.0	0,35	11197
0.5	0,17	44790

AC5F 18LED CW 25D 20W 12-24V DC IP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•	•		•	•	
R,G,B,A	•	•		•	•	
RGB	•	•				
RGBA/W						
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC5F18	24	PWM	2x	4x	-
	12-24	ON/OFF	2x	-	-
	12-24	INV-PVM	2x	5x	-



AL Hamra Palace Hotel, Antalya