



IK 10



- Electrostatic painted aluminum injection body
- Stainless rope mounting bracket and connection pieces
- Rope range between Ø3mm-Ø12mm
- Suitable for outdoor use

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AY380-K	WW-NW-CW	220-240V AC	40	5.035	3,8
AY380-K	WW-NW-CW	220-240V AC	60	7.570	3,8
AY380-K	WW-NW-CW	220-240V AC	80	10.160	3,8

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

S Driver Options

01 Standard Driver

O Lens Options



M: Medium Angle

W: Wide Angle

G Housing Color Options



RAL9005


RAL9007

RAL9016




Order Code

P . W . C . S . O . G




Product Diagrams

Polar Diagram

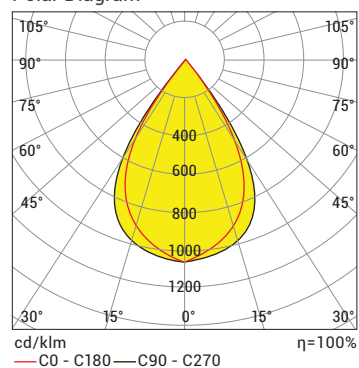

Cone Diagram

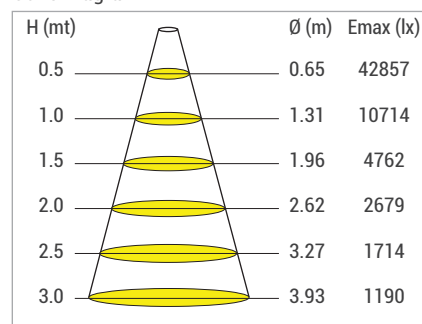

AY380-K NW40 60D 80W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW					•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						