

- Electrostatic powder coated aluminum injection housing and DKP front frame
- Polycarbonate front glass
- Stainless connectors
- Suitable for recessed mounting
- Anti-glare reflector (RAL9005)

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDP3 09	WW-NW-CW	220-240V AC	12	1.225	1,4
CDP3 09	WW-NW-CW	220-240V AC	17	1.685	1,4
CDP3 09	WW-NW-CW	220-240V AC	23	2.395	1,6
CDP3 09	WW-NW-CW	12-24V DC	11	1.120	1,2
CDP3 09	WW-NW-CW	12-24V DC	15	1.580	1,2
CDP3 09	WW-NW-CW	12-24V DC	22	2.290	1,2

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

O Lens Options



XN: Extra Narrow Angle M: Medium Angle W: Wide Angle XW: Without lens

G Housing Color Options



RAL9005 RAL9016 RAL9007

The products are equipped with a black reflector as standard.

I IP Protection Class



*IP65 can only Fixed optimal




Order Code

P . W . C . S . O . G . I . M



Product Diagrams

Polar Diagram

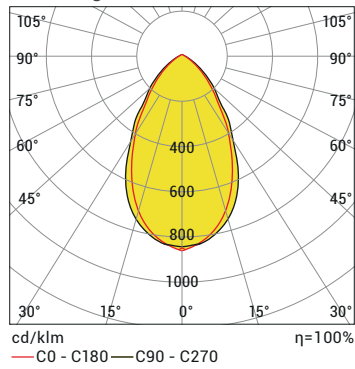

Conical Diagram


H (mt)	Ø (m)	E _{max} (lx)
0.5	0,55	4250
1.0	1,10	1062
1.5	1,66	472
2.0	2,21	866
2.5	2,76	170
3.0	3,31	118

CDP3 CW 60D 12 W 220V AC IP40

M Mounting Options



09: Fixed

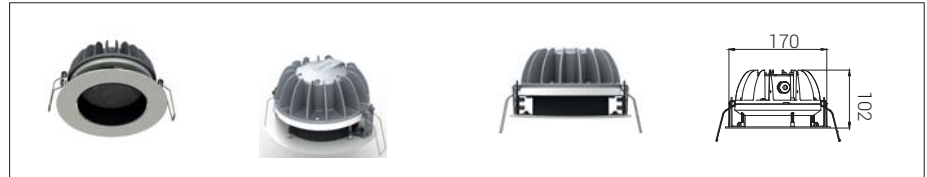

10: Fixed Deep *



11: Deep movable*



12: Deep recessed movable*

*IP65 is not available

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	•
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						