

- Professional LED light source architectural window lighting luminaire
- High optical performance with 1°x180° optical option
- Standard, DMX (Optional) control system

P W Product & Power Options

Product Name	Light Color	Voltage (V)	Power (W)
CIZ	WW-NW-CW	220-240VAC	6

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm

*Different colors are optional

S Driver Options


DMX

G Body Color Options



RAL9005

M Mounting



Ground

O Lens Options



E: Elliptical Angled




Order Code

P . W . C . S . G . M . O



Product Diagrams

Polar Diagram - 1x180°

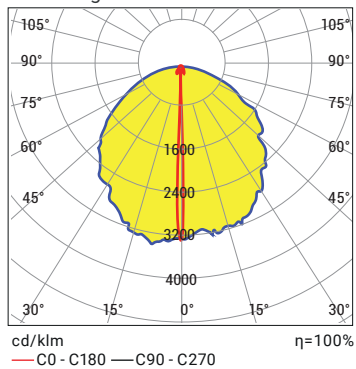

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW ● ● ●	●					
R,G,B ● ● ●			●			



Aspendos Ancient Theater, Antalya