

- Aluminum extruded profile
- UV protected PVC side cover
- Lens, diffuser and combined upper cover version options
- Height adjustable steel suspension wire (max 2m)
- Stainless fittings

P W Product & Power Options

Product Name	Version	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
DELTA350-120	Optical	WW-NW-CW	220-240V AC	30	3.288	2,6
DELTA350-120	Optical	WW-NW-CW	220-240V AC	42	4.076	2,6
DELTA35D-120	Diffuser	WW-NW-CW	220-240V AC	30	2.426	2,2
DELTA35D-120	Diffuser	WW-NW-CW	220-240V AC	42	3.549	2,3
DELTA35C-120	Optical + Diffuser	WW-NW-CW	220-240V AC	30	3.438	2,9
DELTA35C-120	Optical + Diffuser	WW-NW-CW	220-240V AC	42	3.851	2,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional.

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



M: Medium Angle

G Housing Color/Coating Options




01: Anodized RAL9005 RAL9016 29: Walnut 30: Dark Walnut 31: Oak 32: Light Walnut




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

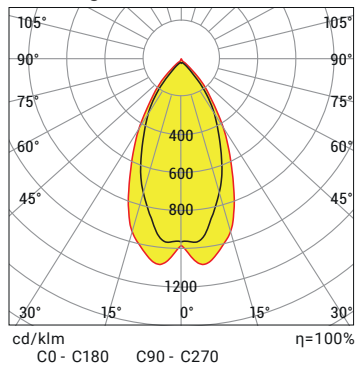

Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	0.52	16803
1.0	1.0	4201
1.5	1.6	1867
2.0	2.1	1050
2.5	2.6	672
3.0	3.1	467

DELTA350-120_A0002 NW40 50D 40W 220VAC IP40

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						