

- Aluminum extruded profile
- UV protected PVC side cover
- UV protected polycarbonate front cover
- Height adjustable steel suspension wire (max 2m)
- Stainless fittings

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
DELTA50D-120	WW-NW-CW	220-240V AC	30	2.976	3,1
DELTA50D-120	WW-NW-CW	220-240V AC	42	4.341	3,1

\*Power and Lumen values provided are based off of a "cold white (CW) LED".

## C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional.

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver

## G Housing Color/Coating Options

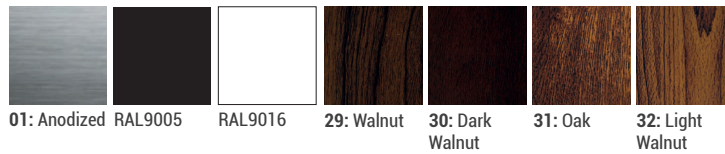


01: Anodized RAL9005 RAL9016 29: Walnut 30: Dark Walnut 31: Oak 32: Light Walnut




Order Code

P . W . C . S . G



## Product Diagrams

Polar Diagram

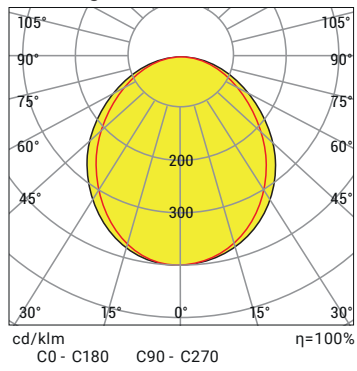

Conical Diagram

H (mt)	$\emptyset$ (m)	E <sub>max</sub> (lx)
0.5	0.52	16803
1.0	1.0	4201
1.5	1.6	1867
2.0	2.1	1050
2.5	2.6	672
3.0	3.1	467

DELTA350-120\_A0002 NW40 50D 40W 220VAC IP40

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						