

- Plastic injection body
- Polycarbonate luminaire glass
- Easy setup system
- New generation Chip RGBW

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
DOT DIAMOND	RGBW	24V DC	2	117	0,07

*Power and Lumen values provided are based off of "cold white (CW) LED".


C Light Color Options




G Housing Color Options



U Upper Cover Options

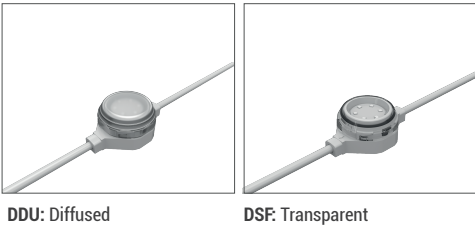

M Mounting Options

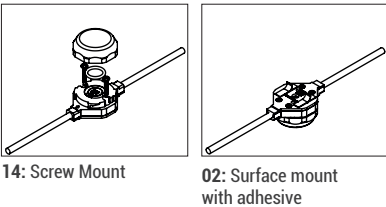

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
RGB/W DMX			•			





Sipariş Kodu

P . W . C . G . U . M . S



Product Diagrams

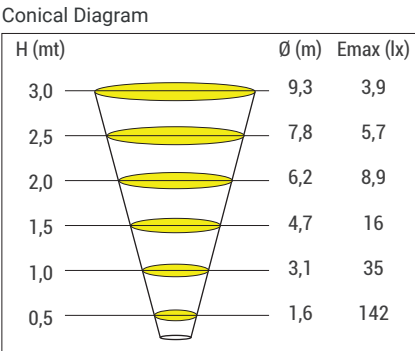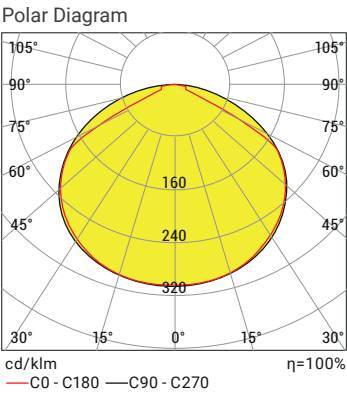


DOT RGBW 2W 24V DC IP66

Accessories

- 33600991: Dot Diamond Mini Buat
- 33600992: Dot Diamond Midi Buat

Standard Connection Scheme

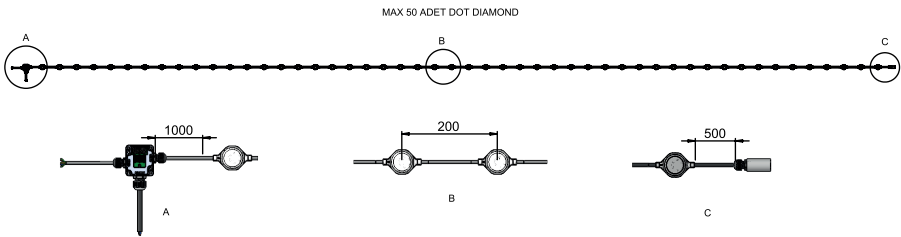

A

- As a DMX data ve power cable:
33400617 CABLE 1x2x0,22mm+1x2x0,75mm+1x0,22mm BLACK

It is the entry point for both data and power.

C

- The distance between pixels can be 20, 50, 60cm.

B

- The last product in the chain should be equipped with an end connector.

33600993 DOT DIAMOND