

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for recess mounting
- Product length standards are; 90cm, 120cm, 150cm and 180cm
- 150cm and 180cm diameters PVC stretch membrane only
- Various sizes are applicable
- Plexiglas is used for the products up to 120cm diameters

## P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Product Options	Luminous Flux (lm)	Diameter (B) (cm)	Weight (kg)
DRMG50	WW-NW-CW	24V DC	50	Plexiglas	3.750	50	6,2
DRMG60	WW-NW-CW	24V DC	75	Plexiglas	5.625	60	6,4
DRMG60	WW-NW-CW	24V DC	100	Plexiglas	7.500	60	6,4
DRMG90	WW-NW-CW	24V DC	50	Plexiglas	3.750	90	9,5
DRMG90	WW-NW-CW	24V DC	100	Plexiglas	7.500	90	9,5
DRMG120	WW-NW-CW	24V DC	100	Plexiglas	8.000	120	12,6
DRMG120	WW-NW-CW	24V DC	100	PVC stretch membrane	8.000	120	12,6
DRMG150	WW-NW-CW	24V DC	130	PVC stretch membrane	10.400	150	11,5
DRMG150	WW-NW-CW	24V DC	260	PVC stretch membrane	20.800	150	11,5
DRMG180	WW-NW-CW	24V DC	200	PVC stretch membrane	16.000	180	12,6
DRMG180	WW-NW-CW	24V DC	400	PVC stretch membrane	32.000	180	12,6

\*Power and Lumen values provided are based off of a cold white (CW) LED.

## C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

## G Housing Color/Coating Options



01:Anodized RAL9005 RAL9016




Order Code

P . W . C . G



## Product Diagrams

Polar Diagram

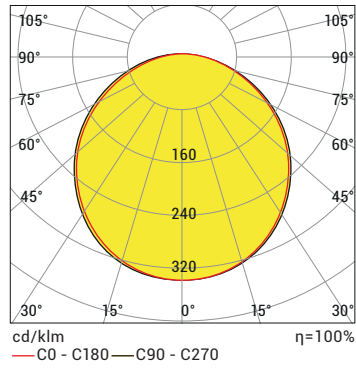

Conical Diagram

H (mt)	Ø (m)	E <sub>max</sub> (lx)
0.5	1,47	7601
1.0	2,94	1900
1.5	4,41	845
2.0	5,89	475
2.5	7,36	304
3.0	8,83	211

DRMG 50 PLEXI CW 50W 24V DC IP44

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX						
WHITE DMX						



Lotus Mall, Russia