

- High efficiency optical design (up to 175 lm/W)
- Anodized aluminum extrusion profile body
- Suitable for external emergency lighting kit
- Suitable for hygienic environments, dust-free body design
- UV protective PVC side cover

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (L) (mm)	Weight (kg)
EOS45	WW-NW-CW	220-240V AC	70	11.957	480	1,4
EOS45	WW-NW-CW	220-240V AC	90	14.724	480	1,4
EOS90	WW-NW-CW	220-240V AC	110	19.232	930	2,5
EOS90	WW-NW-CW	220-240V AC	130	22.495	930	2,5
EOS90	WW-NW-CW	220-240V AC	150	24.756	930	2,5

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 3 hours

O Lens Options



XW: Without Lens


U Top Cover Options

- 01 Diffuse Cover
- 02 Transparent Cover




Sipariş Kodu

P . W . C . S . O . U . M




Product Diagrams

Polar Diagram

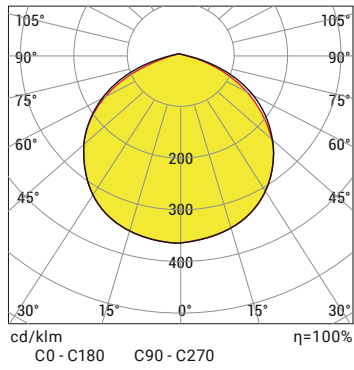


Conical Diagram

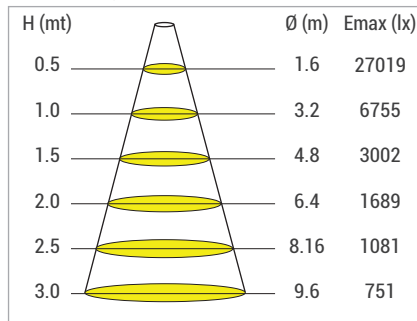

EOS-100 CW65 120D 110W 220VAC

M Mounting Options

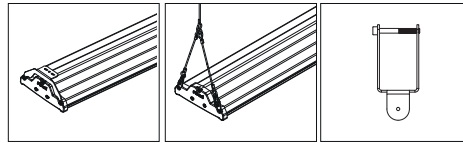

M01: Surface Cable Tray Mounting

M02: Pendant Mounting

M03: Busbar Hanger

**For M02 option rope not included*

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	