

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors
- Metal end cap
- Polycarbonate front cover with UV protection
- Cooling capacity up to 70 W/m
- Suitable for as pendant and surface mounting
- Standard rope size 150cm

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Fixture Model	Length (L) (mm)	Weight (kg)
EPL75-120	WW-NW-CW	220-240V AC	45	4.050	Direct	1217	4,1
EPL75-160	WW-NW-CW	220-240V AC	55	4.950	Direct	1617	5,3

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional.


S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h


G Housing Color/Coating Options

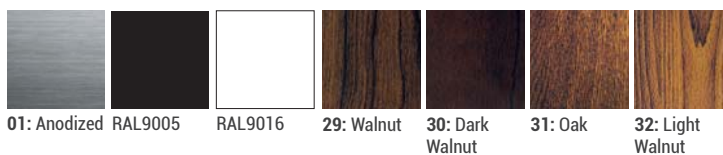

E Additional Pieces Options

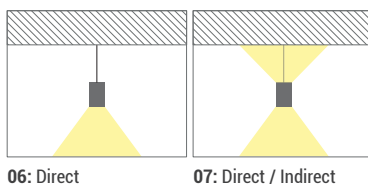


M Mounting Options

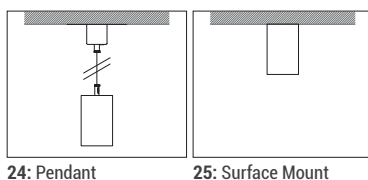


Order Code

P . W . C . S . G . E . M



Product Diagrams

Polar Diagram

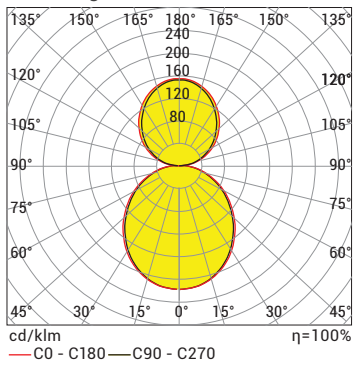






Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	1.40	1595
1.0	2.80	399
1.5	4.21	177
2.0	5.61	100
2.5	7.01	64
3.0	8.41	44

EPL75 CW DIRECT INDIRECT 44W 220V AC IP44D

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 	•			•	•	
R,G,B,A 						
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 