


IP 54

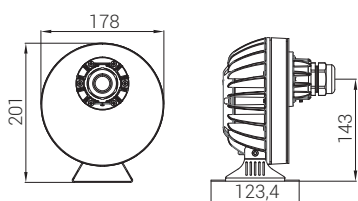

- Electrostatic powder coated aluminum injection body
- Mechanical filter
- High efficiency with Multi-Chip LED
- Works silently, without the need for fan cooling
- Comes with up to 400 mixed fiber optic strands

*See size options in table FO package options


P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Weight (kg)
IK777	WW-NW-CW	220-240V AC	25	2,1
IK777	WW-NW-CW	220-240V AC	40	2,1

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

U Filter Options



24: Without Filter 25: Mechanical Filter

UZ Length Options

0 (Only light source)	200cm
100cm	300cm
150cm	500cm

PK Package Options

100 Mixed Strand	300 Mixed Strand
150 Mixed Strand	350 Mixed Strand
200 Mixed Strand	400 Mixed Strand
250 Mixed Strand	

Fo Package Options

Fiber Optic Cable Type	100 Mixed strand (qty)	150 Mixed strand (qty)	200 Mixed strand (qty)	250 Mixed strand (qty)	300 Mixed strand (qty)	350 Mixed strand (qty)	400 Mixed strand (qty)
20	0	35	60	90	120	140	150
30	20	30	40	60	90	100	120
40	20	25	35	30	40	60	90
60	18	20	30	35	20	28	22
80	16	16	18	20	15	10	10
100	14	12	10	10	9	6	4
120	12	12	7	5	6	6	4

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW						
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Order Code

P . W . C . U . UZ . PK

