

- Electrostatic painted DKP body
- Electrostatic painted DKP frame
- High efficiency low-glare (UGR <19) homogeneous light diffuser
- Efficiency exceeding 100lm/W with backlight technology
- Suitable for surface mount

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxB) (mm)	Weight (kg)
PNSU	WW-NW-CW	220-240V AC	15	1.014	300x300	1,3
PNSU	WW-NW-CW	220-240V AC	22	1.978	300x600	2,4
PNSU	WW-NW-CW	220-240V AC	30	3.160	570x570	4,0
PNSU	WW-NW-CW	220-240V AC	34	4.175	570x570	4,0
PNSU	WW-NW-CW	220-240V AC	42	4.236	570x570	4,0
PNSU	WW-NW-CW	220-240V AC	42	4.450	300x1150	4,2
PNSU	WW-NW-CW	220-240V AC	86	8.780	600x1150	7,5

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h




Order Code

P . W . C . S



Product Diagrams

Polar Diagram

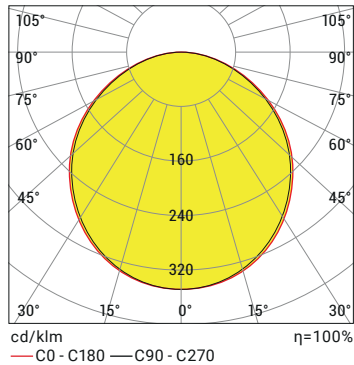

Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	1,49	12409
1.0	2,98	3102
1.5	4,46	1379
2.0	5,95	776
2.5	7,44	496
3.0	8,93	345

PANEL SURFACE 60x120 CW 120D 86W 220V AC IP40

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	•
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Fiberli Factory, Antalya