

- Superior performance with 172,000 lumens
- High cooling capacity body design
- Ultra-narrow 10° optical output
- Safe connection with IP67 socket
- MultiColor technology

## P W Product & Power Options

Product Name	Light Color	Voltage (V)	Power (W)	Weight (kg)
SUPREME PRO I	WW-NW-CW	220-240V AC	440	30
SUPREME PRO II	WW-NW-CW	220-240V AC	880	42
SUPREME PRO III	WW-NW-CW	220-240V AC	1320	55
SUPREME PRO I DMX	RGBW	220-240V AC	360	30
SUPREME PRO II DMX	RGBW	220-240V AC	720	42
SUPREME PRO III DMX	RGBW	220-240V AC	1080	55

\*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

## C Light Color Options


● WW: Warm White	3000K	
● NW: Natural White	4000K	
● CW: Cold White	6500K	

\*Different colors are optional

## S Driver Options

- 01 Standart Driver (ON/OFF)
- 06 DALI Driver

## O Lens Options

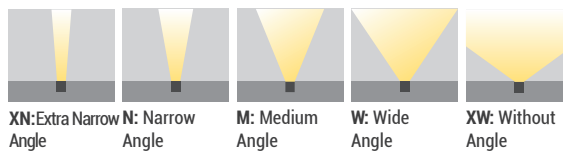

## G Body Color Options




Order Code

P . W . C . S . O . G





## Product Diagrams

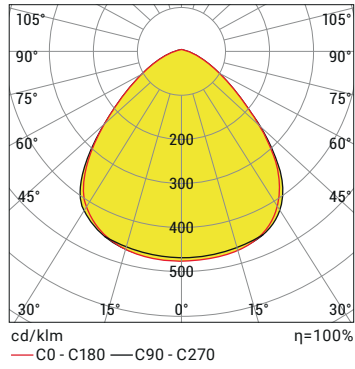Polar Diagram - 90°



## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW 				•	•	
RGBW 			•			

## Additional Pieces Options



Dual assembly



Triple assembly