


- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 4mm tempered luminaire glass
- Aluminum injection side covers
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

Polar Diagram

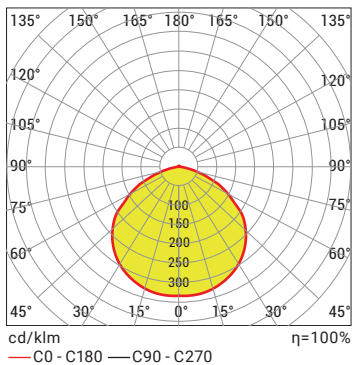

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH16-TECO	WW-NW-CW	220-240V AC	200	26.129	6,90
WH16-TECO	WW-NW-CW	220-240V AC	250	33.140	6,90

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

G Housing Color Options



Order Code

P . W . C . G

