

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 5mm, tempered luminaire glass
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH4	WW-NW-CW	220-240V AC	30	4.270	3,6
WH4	WW-NW-CW	220-240V AC	40	5.328	3,6
WH4	WW-NW-CW	220-240V AC	50	6.311	3,6

**Power and Lumen values provided are based off of a "cold white (CW) LED".*

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

**Different colors are optional*


S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options

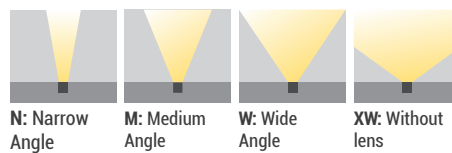

G Housing Color Options




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

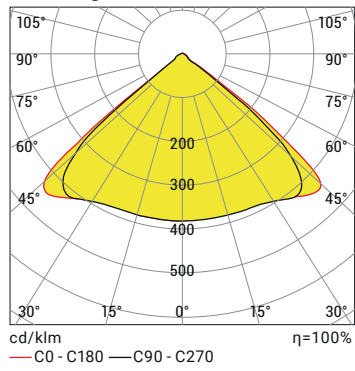

Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
0,5	1.2	6733
1,0	2.5	1683
1,5	3.7	748
2,0	5.0	421
2,5	6.2	269
3,0	7.5	187

WH4 CW65 90D 32W 220VAC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						