


- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 5mm, tempered luminaire glass
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

Polar Diagram

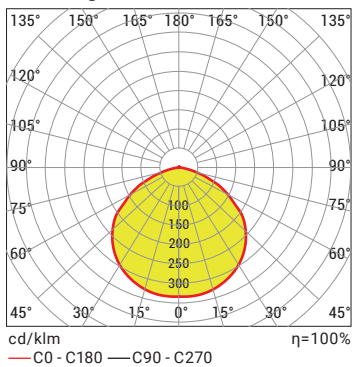

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH6-TECO	WW-NW-CW	220-240V AC	75	10.732	4,1
WH6-TECO	WW-NW-CW	220-240V AC	100	13.350	4,1


\*Power and Lumen values provided are based off of a "cold white (CW) LED".

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional

## G Housing Color Options



Order Code

