




**RDMX**

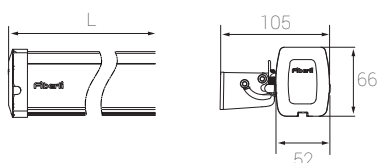

- Anodized aluminum extruded profile
- Polycarbonate luminaire glass
- PVC side covers with invisible gland outlet and UV protection
- Stainless steel fixture stand
- High efficiency group lens
- IP68 air vent
- RDMX configuration
- IP67 socket for DATA-SIGNALS

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Length (L) (mm)	Weight (kg)
WL109-RDMX	RGB	220-240V AC	12	380	1,0
WL218-RDMX	RGB	220-240V AC	23	619	1,5
WL327-RDMX	RGB	220-240V AC	34	909	2,4
WL436-RDMX	RGB	220-240V AC	45	1199	2,9
WL112-RDMX	RGBW/A	220-240V AC	16	380	1,0
WL224-RDMX	RGBW/A	220-240V AC	31	619	1,5
WL336-RDMX	RGBW/A	220-240V AC	45	909	2,4
WL448-RDMX	RGBW/A	220-240V AC	60	1199	2,9

## O Lens Options



**XN:** Extra Narrow Angle  
**N:** Narrow Angle  
**M:** Medium Angle  
**W:** Wide Angle  
**E:** Elliptical Angle


## J Junction Options



**01:** Cable      **02:** IP67 Socket

Only 220V

## K Cable Direction Options

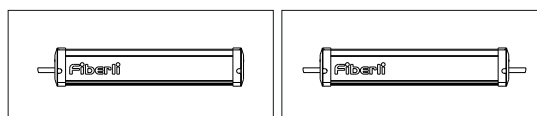


**01:** Single entry      **03:** Dual entry and exit \*

\*Only for energy cable


## M Mounting Options

Stand connector

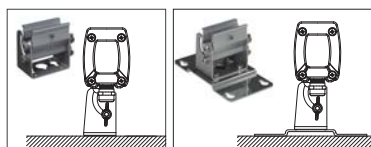

**20:** Standard Stand      **21:** Standard stand/ Mounting kit

Optional Accessories



**34:** Extension piece A=5cm  
**35:** Extension piece A=10cm  
**36:** Extension piece A=20cm

Extension pieces at any desired length are optional




Order Code

P . W . O . J . K . M




## Product Diagrams

Polar Diagram

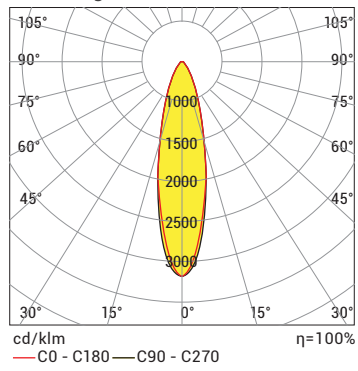

Polar Diyagramı

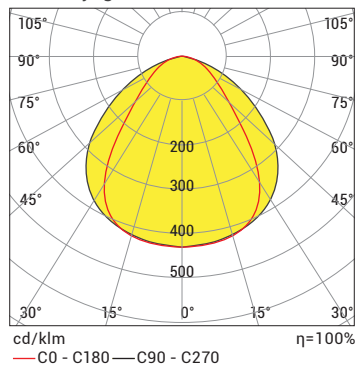

## Connecting fittings



## Additional Pieces Options



## Dual assembly




## Ternary assembly




## Quaternary assembly



## Standard Connection Scheme

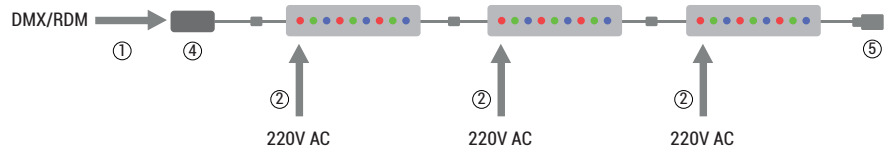

## Connection Scheme with Extension Socket

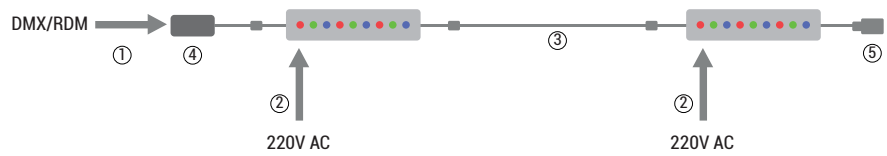

(1) DMX DATA CABLE, 33400474 : CABLE 2X0,22 KR-SY LI2Y(ST)CH TP GREY

(2) AC SUPPLY CABLE, 3x1mm TTR

(3) 26000xxx : SOCKET RDMX L:100/200/400/600/800/1000cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)



(4) 33600755 : RDMX INPUT JOINT



(5) 33600696 : RDMX TERMINATOR

## Accessories

33400474 : CABLE 2X0,22 KR-SY LI2Y(ST)CH TP GREY

26000122 : SOCKET RDMX L:100cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)

26000150 : SOCKET RDMX L:200cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)

26000151 : SOCKET RDMX L:400cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)

26000152 : SOCKET RDMX L:600cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)

26000153 : SOCKET RDMX L:800cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION IP67 (YM)

26000154 : SOCKET RDMX L:1000cm 4 PIN MALE-FEMALE DOUBLE SIDED EXTENSION





Limak Hotel, Antalya